2-9. STATIONARY INSTALLATION.

2-10. POWER REQUIREMENTS. An R. L. Drake Model AC–4 Power Supply rated at 120 volts ac, 50/60 Hz, is required for stationary installations. The AC–4 is designed to fit inside the MS–4 speaker cabinet.

2-11. VIEWING ANGLE. Refer to figure 2-5 for illustrations of viewing angle options. See Chapter V for bottom cover removal.

2-12. ACCESSORIES. Refer to figures 2-6 through 2-9 for the electrical connections required to operate the TR–4C with the various recommended accessories.

NOTE

If the old RV–3 is to be used it must be modified as follows: Install a 22 K, 2 Watt resistor from pin 1 of the tube (0A2) to the terminal of the FUNCTION switch to which the orange wire is attached.

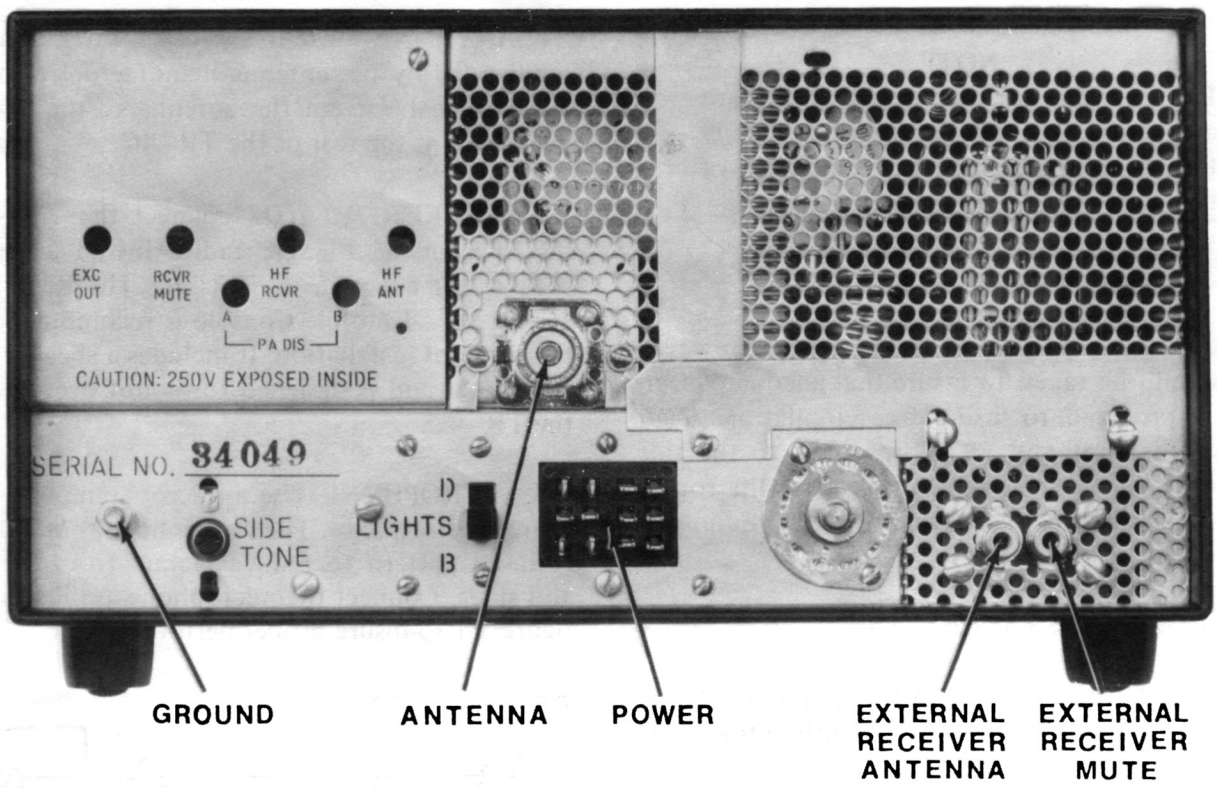


Figure 2–2. Rear Chassis Connectors